

Rolls

FLOODED DEEP CYCLE BATTERIES

12 HHG 8D

12 VOLTS



CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Auto or Flag MT
HANDLES:	Rope

WEIGHT DRY:	60 kg	132 Lbs.
WEIGHT WET:	78 kg	172 Lbs.
LENGTH:	527 mm	20 3/4 Inches
WIDTH:	279 mm	11 Inches
HEIGHT:	254 mm	10 Inches

PLATE HEIGHT:	140 mm	5.500 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	3.18 mm	0.125 Inches
THICKNESS (NEGATIVE):	2.08 mm	0.082 Inches




CELLS:	25 Plates/Cell	6 Cell
SEPARATOR THICKNESS:	2 mm	0.061 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	64 mm	2.5 Inches

COLD CRANK AMPS (CCA):	0°F / -17.8°C	1155
MARINE CRANK AMPS (MCA):	32°F / 0°C	1444
RESERVE CAPACITY (RC @ 25A):		557 Minutes

CAPACITY **275 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	366	3.66
@ 72 HOUR RATE	1.280	347	4.81
@ 50 HOUR RATE	1.280	327	6.55
@ 24 HOUR RATE	1.280	283	11.80
@ 20 HOUR RATE	1.280	275	13.75
@ 15 HOUR RATE	1.280	259	17.23
@ 12 HOUR RATE	1.280	245	20.40
@ 10 HOUR RATE	1.280	234	23.38
@ 8 HOUR RATE	1.280	220	27.50
@ 6 HOUR RATE	1.280	204	33.92
@ 5 HOUR RATE	1.280	193	38.50
@ 4 HOUR RATE	1.280	179	44.69
@ 3 HOUR RATE	1.280	162	54.08
@ 2 HOUR RATE	1.280	140	70.13
@ 1 HOUR RATE	1.280	99	99.00

CYCLE LIFE VS. DEPTH OF DISCHARGE

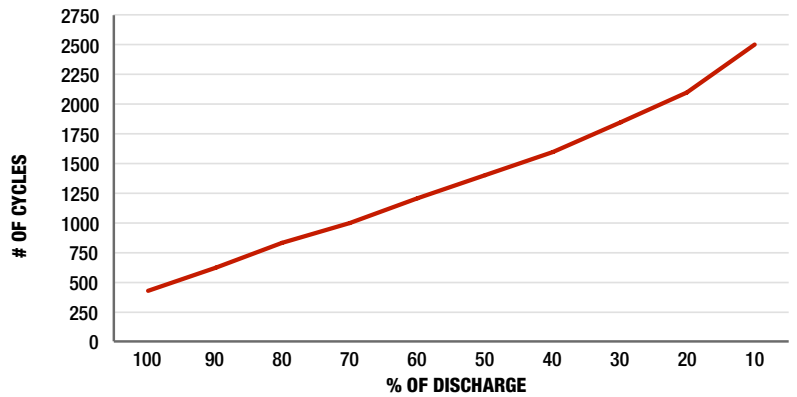

VOLTAGE VS. DEPTH OF DISCHARGE

