


# 8GGC2-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	198Ah
Capacity at C/20	180Ah
Weight	69 lbs. (31 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)

For Charging Parameters please refer to [www.mkbattery.com](http://www.mkbattery.com)  
Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	U (SAE/STUD)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

## Valve-Regulated, Gelled-Electrolyte Battery




## DIMENSIONS

*Inches (mm)*

Length	10.25 (260 mm)
Width	7.09 (180 mm)
Height	10.88 (276 mm) <i>Including terminal</i>

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

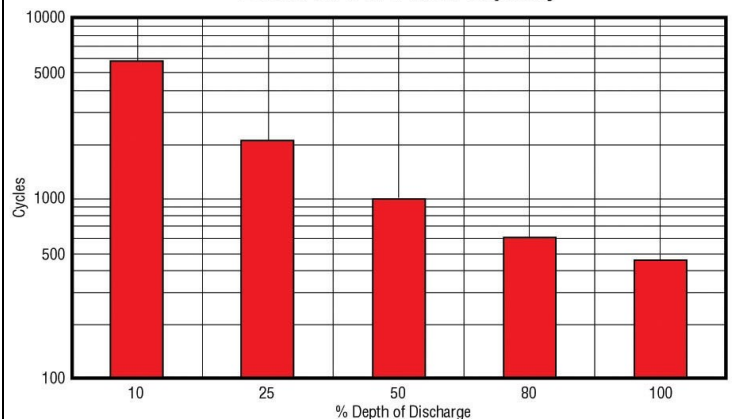

Cycle Chart applies to all MK Gel batteries (except 8GGC2-DEKA cycle chart x 2 and 8G31DT-DEKA cycle chart x .67).

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

